



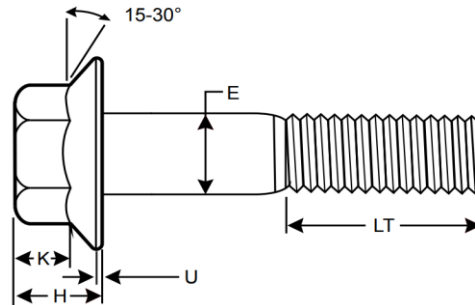

FAST FLANGE
SUSTAINABLY SOURCED FASTENERS

Metric Class 10.9 Hex Flange Screws



DIMENSIONS	DIN 6921
MATERIAL	10.9 ISO898-1
TENSILE STRENGTH	1040N/MM2 Minimum
THREADING	ISO 261 ISO 965-2 Class 6g
HEADMARK	10.9

SIZE	WIDTH A/F (F)		WIDTH A/C (G)	PARTIAL THREAD (LT)	BODY DIAMETER (E)	
	MAX	MIN	MIN		MAX	MIN
M6-1.0	10.00	9.78	10.95	18	6.00	5.82
M8-1.25	13.00	12.73	14.26	22	8.00	7.78
M10-1.5	15.00	14.73	16.50	26	10.00	9.78
M12-1.75	16.00	15.73	17.62	30	12.00	11.73
M14-2.0	18.00	17.73	19.86	34	14.00	13.73
M16-2.0	21.00	20.67	23.15	38	16.00	15.73

SIZE	HEIGHT OF HEAD (H)	FLANGE THICKNESS (U)	WRENCH HEIGHT (K)	FLANGE DIAMETER (B)
	MAX		MIN	
M6-1.0	6.60	1.10	2.50	14.20
M8-1.25	8.10	1.20	3.20	18.00
M10-1.5	9.20	1.50	3.60	22.30
M12-1.75	11.50	1.80	4.60	26.60
M14-2.0	12.80	2.10	5.10	30.50
M16-2.0	14.40	2.40	5.80	35.00